

FORMEX® Flotation for Floating Marine Structures


Prices as of 05/12/2016

| Size | Weight | Buoyancy | A | B | C | D | E | F | G | H | Price |
|-------------|--------|----------|-----|-----|-----|-----|-----|-----|-----|----|----------|
| 12"x24"x48" | 22 lbs | 446 lbs | 36" | 47" | 48" | 12" | 23" | 24" | 12" | 4" | \$134.00 |
| 12"x36"x48" | 31 lbs | 674 lbs | 36" | 47" | 48" | 24" | 35" | 36" | 12" | 4" | \$159.00 |
| 12"x48"x48" | 41 lbs | 914 lbs | 36" | 47" | 48" | 36" | 47" | 48" | 12" | 4" | \$197.00 |
| 12"x48"x72" | 65 lbs | 1370 lbs | 60" | 71" | 72" | 36" | 47" | 48" | 12" | 4" | \$255.00 |
| 12"x48"x96" | 75 lbs | 1800 lbs | 84" | 95" | 96" | 36" | 47" | 48" | 12" | 4" | \$324.00 |

| | | | | | | | | | | | |
|-------------|--------|----------|-----|-----|-----|-----|-----|-----|-------|------|----------|
| 18"x24"x48" | 29 lbs | 670 lbs | 36" | 47" | 48" | 12" | 23" | 24" | 17.7" | 5.7" | \$165.00 |
| 18"x36"x48" | 39 lbs | 1028 lbs | 36" | 47" | 48" | 24" | 35" | 36" | 17.7" | 5.7" | \$204.00 |
| 18"x48"x48" | 52 lbs | 1383 lbs | 36" | 47" | 48" | 36" | 47" | 48" | 17.7" | 5.7" | \$242.00 |
| 18"x48"x72" | 75 lbs | 2090 lbs | 60" | 71" | 72" | 36" | 47" | 48" | 17.7" | 5.7" | \$325.00 |
| 18"x48"x96" | 98 lbs | 2700 lbs | 84" | 95" | 96" | 36" | 47" | 48" | 17.7" | 5.7" | \$384.00 |

| | | | | | | | | | | | |
|-------------|---------|----------|-----|-----|-----|-----|-----|-----|-----|-----|----------|
| 24"x24"x48" | 33 lbs | 903 lbs | 36" | 47" | 48" | 12" | 23" | 24" | 24" | 12" | \$193.00 |
| 24"x36"x48" | 52 lbs | 1377 lbs | 36" | 47" | 48" | 24" | 35" | 36" | 24" | 12" | \$242.00 |
| 24"x48"x48" | 65 lbs | 1851 lbs | 36" | 47" | 48" | 36" | 47" | 48" | 24" | 12" | \$288.00 |
| 24"x48"x72" | 92 lbs | 2810 lbs | 60" | 71" | 72" | 36" | 47" | 48" | 24" | 12" | \$385.00 |
| 24"x48"x96" | 124 lbs | 3700 lbs | 84" | 95" | 96" | 36" | 47" | 48" | 24" | 12" | \$495.00 |

The above buoyancy values were established by using a mass density / displacement of fresh water of 62.4 lb.ft³

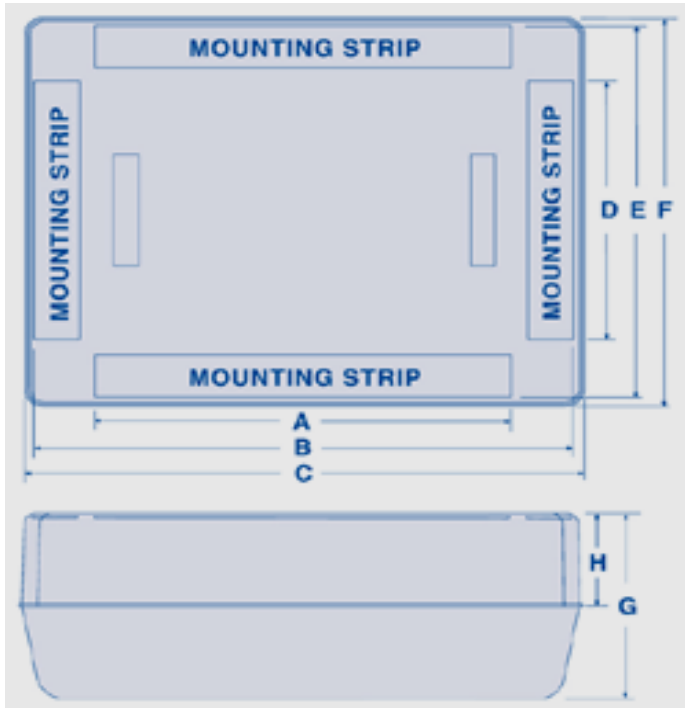

Advantages of Formex® Floats:

1. **Armor Shell** - High impact strength polyethylene shell.
2. **Integral Bond** - Foam thermally bonds to shell, minimizing space between shell and foam.
3. **Patented Mounting Strips** - Four extra wide, super thick mounting strips provide easy direct attachment.
4. **Positive Strong Grip** - 3/8" lag bolts provide over 500 lbs. In straight pullout force.
5. **Versatile** - Works for most dock frames whether it is a new or retrofitted dock.
6. **Solid Core** - Unique process permits each foam block to be inspected prior to encapsulation.



TAYLORFOAM
CREATION · FABRICATION · PRODUCTION

Taylor Foam, Inc. 370 N. Rockwell Ave. OKC, OK 73127
Toll Free 866-236-FOAM Fax: 405-787-5817

www.taylorfoam.com

Covered under one or more of the following U.S. Patents:

No. 5,133,276; No. 5,401,456; and Patents Pending